


1-INCH RISER EXTENSION PRODUCT GUIDE

TO BEGIN INSTALLATION...

- Remove risers from upper triple tree or pullback plate.
- Insert extensions under risers and use provided hardware to re-install the risers.


NOTE: See diagram to ensure correct hardware.

- Tighten the new risers bolts. **Torque to 55 ft-lbs (75N-m)**

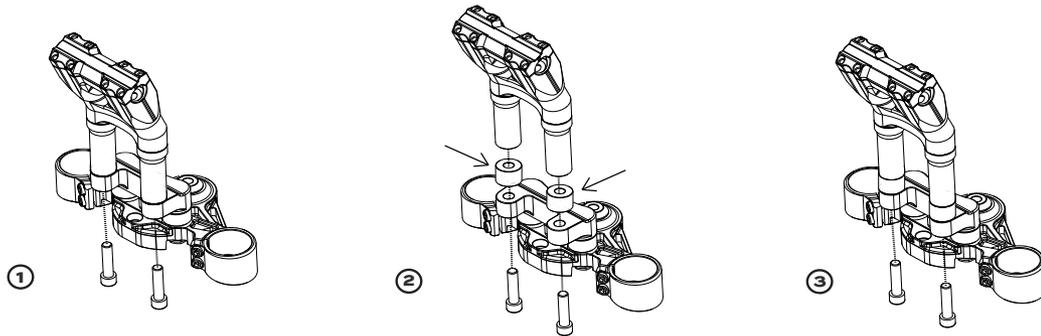



Veloci/ Raptor

No Pullback Plate/ T-Rex/ SDC Dagger

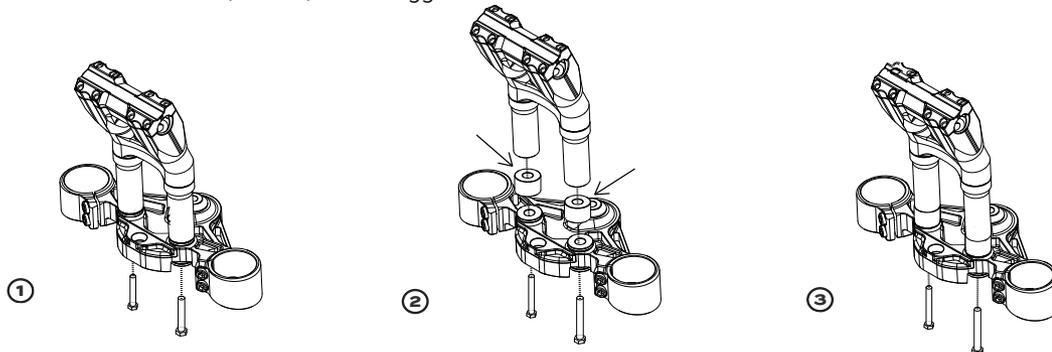

No Pullback Plate/
T-Rex/ SDC Dagger

Veloci/ Raptor

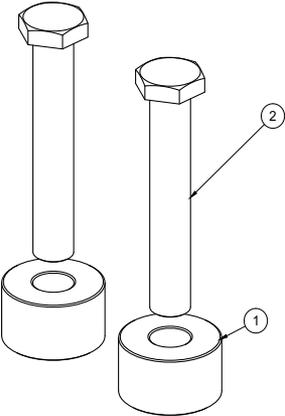UN-RI-01		UN-RI-02	
			
1	1" Riser Spacer (Black/Machine)	1	1" Riser Spacer (Black/Machine)
2	1/2"-13 x 4" Grade 5 Zinc Finish Hex Tap Bolt	2	1/2"-13 x 2.5" Grade 5 Black Oxide Finish Socket Cap Bolt